

## **WF50**

## **Dual Band Wi-Fi USB Dongle**

Yealink WF50 is a next-generation Wi-Fi USB Dongle, designed to allow users to select whether to connect to a 2.4GHz (150 Mbps) Wi-Fi network or a 5GHz (up to 433 Mbps) Wi-Fi network. With wireless connections transitting over the 5GHz band, users no longer need to worry about the interference from nearby wireless devices which may interfere with their wireless signal, guaranteeing high-quality connections perfect for establishing calls and HD video streaming.

This dynamic plug-and-play style USB device is equipped with WPA/WPA2 encryptions, providing your network with active defense against security threats. Besides, WF50 owns the ability to establish Wi-Fi connectivity easily, quickly, and reliably, so that users can optimally communicate, collaborate and more.

Yealink WF50 is compliant with IEEE 802.11a/b/g/n/ac standard, maximazing reliability and throughput.



## **Key Features and Benefits**


- WF50: compatible with Yealink SIP-T27G/T41S/T42S/T46S/T48S/T42U/T43U/T46U/T48U/T52S/T54S/T53 IP Phone (Version 84 or later) and Teams T55A/Skype for BusinessT55A/Teams T56A/Skype for BusinessT56A/Teams MP54/Skype for Business MP54
- WF50 (V1): compatible with Yealink SIP-T42U/T43U/T46U/T48U (108.86.0.70 or later), Yealink SIP-T53 (96.86.0.70 or later) and Teams MP54
- Dual-Band Connectivity
- High Transmission Rate
- Interference Free
- Reliable Connection
- Easy to Use
- Plug and Play

## **Specifications**



Specifications	Description
Specifications	<ul> <li>Network Standard: IEEE 802.11 a/n/ac, IEEE 802.11 b/g/n</li> <li>Transmission Rate: - 5 GHz: 11ac: Up to 433Mbps(dynamic) 11n: Up to 150Mbps(dynamic) 11a: Up to 54Mbps(dynamic) - 2.4 GHz: 11n: Up to 150Mbps(dynamic) 11g: Up to 54Mbps(dynamic) 11b: Up to 11Mbps(dynamic) 11b: Up to 11Mbps(dynamic)  Frequency Range: 2.4 GHz/5 GHz OS Support: Linux, Android Antenna Type: Integrated Security: WEP, WPA/WPA2,WPA-PSK/WPA2-PSK, WPA2-Enterprise Interface: USB 2.0 Operating Voltage: 5.0 V DC ±5% Dimensions (L x W x H): 52 mm x 27 mm x 8 mm Weight: 28 g Operating Temperature: 0°C to +40°C (32°F to 104°F) Storage Temperature: -30°C to +70°C (-22°F to 158°F) Operating Humidity: 10% to 90% (Non-condensing)</li> </ul>
Package Features	<ul> <li>Package Content:</li> <li>WF50</li> <li>User Guide</li> <li>Qty/CTN: 80 PCS</li> <li>N.W/CTN: 1.70 kg</li> <li>G.W/CTN: 2.20 kg</li> <li>Giftbox size: 136 mm x 70 mm x 40 mm</li> <li>Carton meas: 443 mm x 305 mm x 285 mm</li> </ul>
Certifications	CE FC & COMPILIAN IC: 10741A-WF50



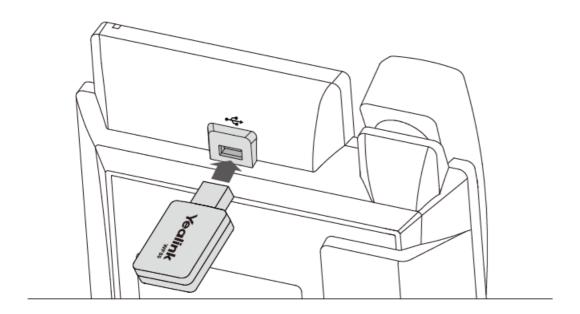

Click Here to go to the product introduction on the Yealink official website.