

**Duo Series P730**

**Smart 4K Dual-Lens PoE Camera with 180° Panoramic View**



**Dual-Lens**

Combines two lenses into one view with no dead ends.



**180° Panorama**

Covers a larger area with a 180° ultra-wide viewing angle.



**4K UHD**

Reveals much finer details with stunning 4K clarity.



**Smart Detection**

Get notified when a person, vehicle, or animal is detected.



**Color Night Vision**

Captures full-color images at night with its spotlights on.



**Two-Way Audio**

Talk to anyone in front of the camera in real-time.



**Power over Ethernet**

Transmit data and power with only one Ethernet cable.



**IP66 Weatherproof**

Works perfectly indoors or outdoors no matter the weather.



**Multiple Storage Options**

Save videos to a microSD card, Reolink NVR or FTP server.




### Double Your Vision

The dual-lens camera can stitch two views into one with no gap. It covers a larger area with a 180° panoramic view.



### Full-Color 4K Videos, Day or Night

Get razor-sharp, full-color recordings in 4K clarity day or night. Never miss any important details.

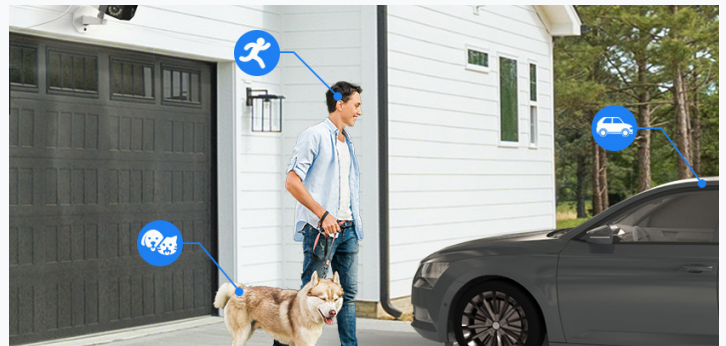

### Know What's Happening

Get alerts only when people, vehicles, and animals are detected, reducing false alarms caused by shadows and flying insects.



### All-Round Deterrence to Intruders

Deter intruders effectively with spotlights on or the siren activated. Or scare off unwanted guests using two-way audio.



### Flexible Storage Options


Save your recordings to a microSD card of up to 256 GB, Reolink NVR, or FTP server. Choose as you like.

Gallery



**One App/Client for All Control**

Stay connected to your home or business anytime, anywhere.

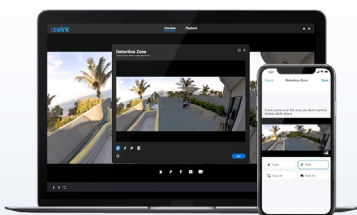

**Privacy in Your Hands**

We made it a priority to ensure that your privacy is protected and your data is for your eyes only.



<b>Model</b>	Duo Series P730	
<b>Video &amp; Audio</b>	Image Sensor	1/2.7" CMOS Sensors
	Video Resolution	Default: 4608X1728 (8.0 megapixels) at 20 fps
	Lens	f = 3.2 mm fixed, F = 2.0
	Video Format	H.265
	Field of View	Vertical: 60° Horizontal: 180°
	Day & Night	Auto-switching with IR cut filter
	Infrared Night Vision	30 meters (LED: 6pcs/20mil/850nm)
	Color Night Vision	Spotlight: 8pcs/5W/6500K/560 Lumens
	Audio	Two-way audio
<b>Power</b>	PoE	IEEE 802.3af, 48V Active
	DC Power	DC 12V==2A, <12W
<b>Interface</b>	Power	DC power port
	System	Reset button
	Ethernet	One 10M/100Mbps; RJ45
	Storage	microSD card slot (Max. 256GB)
	Audio	Built-in microphone and speaker
<b>Software Features</b>	Frame Rate	Mainstream: 4fps - 20fps (default: 20fps) Substream: 4fps - 20fps (default: 10fps)
	Code Rate	Mainstream: 3072-10240Kbps (default: 8192kbps) Substream: 256-2048Kbps (default: 1024kbps)
	Browser Supported	Edge, Chrome, Firefox, Safari
	OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
	Smart Alarm	Motion detection; person detection; vehicle detection; animal detection
	Record Mode	Motion-triggered recording (default); scheduled recording; 24/7 recording
	Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP,DNS, DDNS, FTP, P2P
	Maximal User Access	20 Users (1 admin account & 19 user accounts); Supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
	Work with	Google Assistant
<b>Working Environment</b>	Temperature	Operating temperature: -10°C~+55°C (14°F~131°F)
	Humidity	Operating humidity: 10% ~ 90%
	Waterproof	IP66
<b>Size &amp; Weight</b>	Dimension	195x103x56 mm
	Weight	680g
<b>Warranty</b>	Limited Warranty	2-year limited warranty. For support, visit <a href="https://support.reolink.com/hc/en-us/">https://support.reolink.com/hc/en-us/</a>



- |          |                   |                    |
|----------|-------------------|--------------------|
| 1 Lens   | 2 Daylight Sensor | 3 Spotlight        |
| 4 IR LED | 5 Mic             | 6 Mounting Bracket |



- |                     |                |           |
|---------------------|----------------|-----------|
| 1 microSD Card Slot | 2 Reset Button | 3 Speaker |
|---------------------|----------------|-----------|



1 Power

2 Network

3 Waterproof Lid



1 You can mount the cam on the wall or on the ceiling.

2 You can loosen the screw to adjust the cam in any direction, and then tighten the screw to fix the cam.

**What's in the Box**

Duo Series P730 (x1)

Mounting Hole Template (x1)

Pack of Screws (x1)

Mounting Plate (x1)

Quick Start Guide (x1)

Surveillance Sticker (x1)

Waterproof Lid (x1)

1m Network Cable (x1)

Screwdriver (x1)

**Best Companion**



PoE Injector



microSD Card



Ethernet Cable



Waterproof Lid



RLA-PS1 (PoE Switch)



**Remote Access & Control**

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at [reolink.com](https://reolink.com). Keep out of reach of children.

**Limited Warranty**

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: <https://reolink.com/warranty-and-return/>